




Blackhawk Slim Low PIM Omni Antenna

698/2700 MHz, 3/4/5/dBi (ANT-BH-00010)

The Blackhawk Slim Ceiling Dome is the ideal solution for a clean, ascetic appearance without sacrificing performance. Being wideband it supports all Australian carriers and network frequencies making it a top contender for those requiring maximum coverage with minimal profile. Perfect for repeater applications that require a 360° beamwidth for complete internal coverage.


Measuring a miniscule 7.3mm thickness and only 190mm in diameter, this high grade, low profile antenna is ideal for deployment in hotels, convention centres and other venues where aesthetics are of primary importance.

Featuring 3/5db gain across a wideband range, the Blackhawk Slim Ceiling Dome is able to provide complete internal coverage across a range of carriers and networks. The thin white design allows it to be nearly invisible when mounted to the ceiling of a building, providing industry leading increases for in building coverage and capacity.

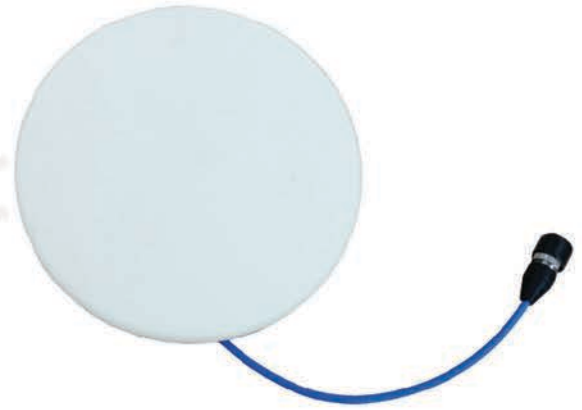


BLACKHAWK Slim Low PIM Omni Antenna

ELECTRICAL SPECIFICATIONS	MECHANICAL SPECIFICATIONS
Freq Rge 698 - 2700MHz	Dimensions Ø190x7.3 mm
Impedance 50 Ω	Weight 0.25 kg
VSWR ≤1.8	Operating Temperature -40°C- +65°C
Gain 3/5 dBi	Connector N-Female/ 4.3-10 DIN Female
Max Input Power 50W	Rated Wind Velocity 210km/h
Horizontal Polarisation	Material ABS (UV Stabilized), PCB
BeamwidthH360°/V70°,76°,85°120°	Antenna Colour White

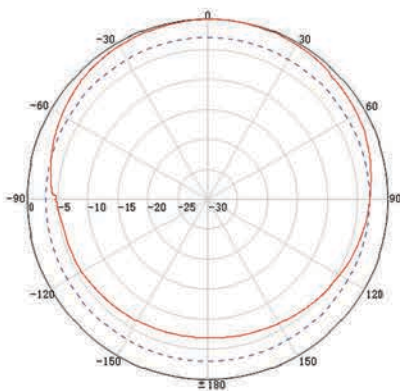

Vertical Pattern

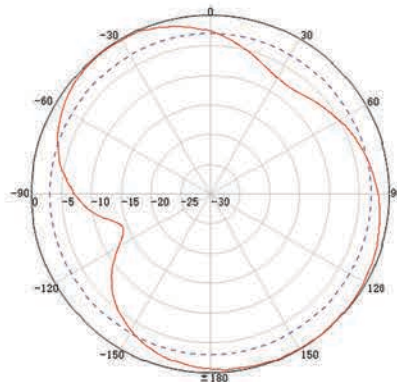

Horizontal Pattern

ABN: 42 082 948 463

Telephone: 1300 769 378
Telephone: +61 7 5577 0500

Email: sales@powertec.com.au
Website: www.powertec.com.au

16/511 Olsen Avenue
Southport QLD 4215
Australia