
CEL-FI GO QUICK START GUIDE

STATIONARY VERSION




Smart Signal Booster_™

CEL-FI GO is an evolved cellular signal booster design that can amplify cellular signals up to 100 dB. Connect a single Donor Antenna to receive the macro-network signals, and then a single indoor Service Antenna where you need service, and CEL-FI GO will do the rest automatically.

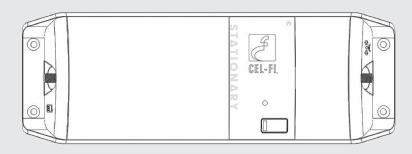










Install **Donor Antenna** where the mobile device receives this signal.

DONOR ANTENNA NOT INCLUDED




SAFETY: **DO NOT INSTALL** any equipment close to power lines or drill into walls or other structural elements without first ensuring the location is safe and that there are no hidden items that could be or cause injury.



Install **Service Antenna** where coverage is needed.

SERVICE ANTENNA NOT INCLUDED

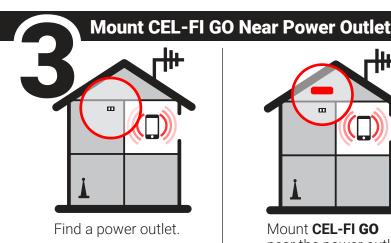




Mount CEL-FI GO near the power outlet.





DO NOT plug in at this time.

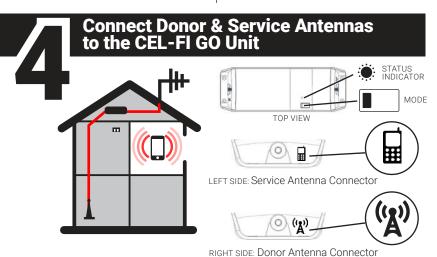

Plug in CEL-FI GO & Select Mode

Press the MODE button on the unit to select desired scanning mode. Status Indicator will blink during the setup process, and may take a few minutes to complete. (OPTIONAL: use your smartphone to select mode. Download the CEL-FI WAVE app, and follow the on-screen instructions.)





(*NOTE: if Error, go to troubleshooting at cel-fi.com/support)



Keep Donor and Service antennas separated/isolated from each other for best performance

Do not use cable splitters for antennas

Follow the installation instructions for your chosen antennas

Use sealant if any connections are exposed to elements

Installation Process

For more CEL-FI GO features, go to App Store or Google play and download the mobile CEL-FI WAVE app.

(NOTE: If you do not have a compatible smartphone, go to **cel-fi.com/wave** to download the Desktop app.)

